



Manufacturer

VEM motors GmbH - Werk Zwickau
Äußere Dresdner Str. 35

Customer

akkerstraat 10

08066 ZWICKAU
Deutschland

Three-phase motors with squirrel cage rotor, Housing grey cast iron

Type	IE3-W41R 112 MV6		
Design output	(kW)	2,2	
Design torque	(Nm)	22	
Class IE	[-]	IE3-84,3%	
Efficiency determination	EN 60034-2-1		
Duty type		S1	
Design frequency	(Hz)	50	
Design speed	[rpm]	955	
Voltage	(V)	230/400	
Connection	[-]	D	Y
Current	[A]	8.96	5.15
Relative pull-in current	[-]	5,7	
Relative starting torque	[-]	2,4	
Relative pull-up torque	[-]	2,3	
Relative pull-out torque	[-]	2,9	
Efficiency100/75/50 %	[%]	84,3 / 83,6 / 80,9	
Power factor	[-]	0,74	
Th. cl.		155(F/B)	
Coolant temperature	(°C)	-20°C...+40°C	
Altitude above sea level	(m)	1000m	
Degree of protection IP		IP55	
Moment of inertia	(kgm ²)	0,0155	
Motor weight	(kg)	48	
Bearing, D-side		6206 2Z C3	
Bearing, N-side		6206 2ZN C3	
Relubrication interval	(h)		
Grease type		Asonic GLY 32	
Grease amount	[cm ³]		
A-sound pressure level	(dB)	a.A.	

Options

Type of mounting	IM B14
Flange	FT 130[C 160]
Terminal box	Standard
Position of terminal box	on the top
Cable gland	Sealing plug
Position of cable entry	right
Shaft	Standard, 1 shaft end
Bearing	Easy bearing arrangement
Limit values to vibration velocity	Class A
	Balancing with half key
Colour system	01 Moderate (KK C2),RAL 7031 blue-grey
Delivery conditions and/or official regulations:	IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer

Three-phase motors with squirrel cage rotor,
Housing grey cast iron


IE3-W41R 112 MV6

Mounting position



Type of mounting: IM B14
Flange: FT 130[C 160]
Position of terminal box: on the top
Brake type:
Forced-ventilation:

Terminal box: KA 05
Cable gland O: 1 xSealing plug

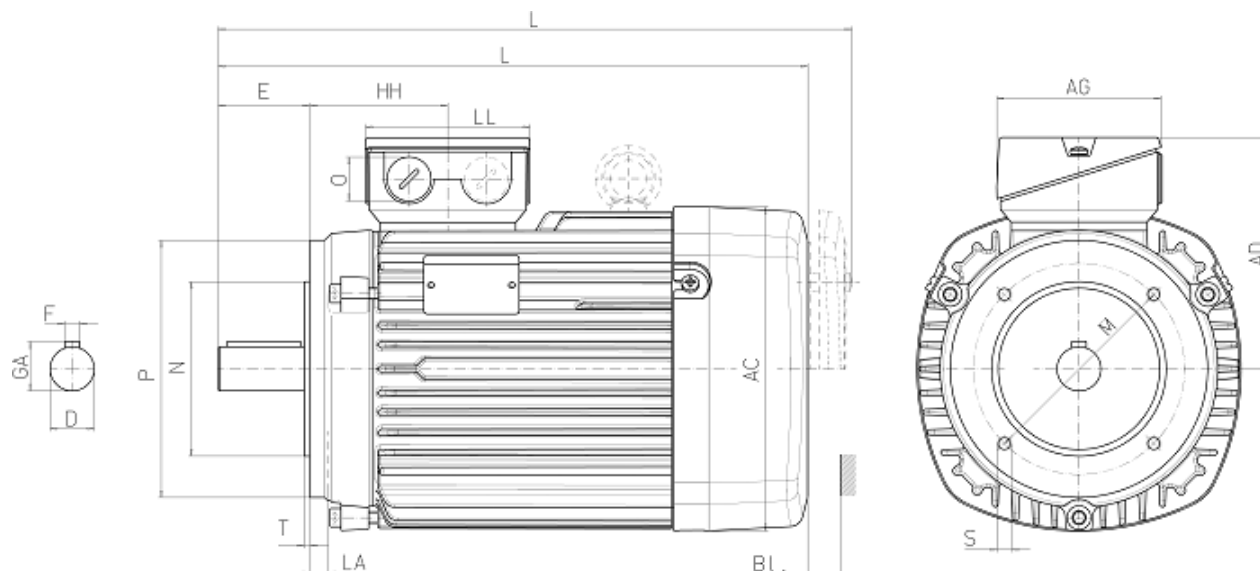

Motor

A	AA	AB	AC	AD	B	B'	BA	BA'	BB	C	CA	K	K'
-	-	-	196	137	-	-	-	-	-	-	-	-	-
Protection cover											Terminal box		
L	LC	H	HA	HD	HH	BI		L		AG	LL	BE	AH
421	-	112	-	-	77	20		-		92	92	-	-

Flange

P	N	LA	M	T	S	Tolerances							
160	110	10	130	3,5	M8			H	N	D	DA		
								-0,5	j6	k6	k6		

Shaft-DS

D	E	GA	F	DB
28	60	31	8	DIN 332 DS- M10

Shaft-NS

DA	EA	GC	FA
-	-	-	-

DB...Centre hole

Delivery conditions and/or official regulations: IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer