



Manufacturer

Customer

VEM motors Thurm GmbH
Äußere Dresdener Str. 35

08066 ZWICKAU
Deutschland

Three-phase motors with squirrel cage rotor,
Housing grey cast iron

Type	IE3-W41R 80 GY2	
Design output	(kW)	1,1
Design torque	(Nm)	3,66
Class IE	(-)	IE3-82,7%
Efficiency determination		EN 60034-2-1
Duty type		S1
Design frequency	(Hz)	50
Design speed	[rpm]	2870
Voltage	(V)	230/400
Connection	(-)	D
Current	(A)	3.9
Relative pull-in current	(-)	7
Relative starting torque	(-)	2,8
Relative pull-out torque	(-)	3,4
Efficiency 100/75/50 %	(%)	82,7 / 83,8 / 82,6
Power factor	(-)	0,86
Th. cl.		155(F/B)
Coolant temperature	(°C)	-20°C...+40°C
Altitude above sea level	(m)	1000m
Degree of protection IP		IP55
Moment of inertia	(kgm ²)	0,00132
Motor weight	(kg)	15
Bearing, D-side		6205 2Z C3
Bearing, N-side		6205 2Z C3
Relubrication interval	(h)	
Grease type		Asonic GLY 32
Grease amount	(g)	
A-sound pressure level	(dB)	a.A.

Options

Type of mounting	IM B3
Flange:	-
Terminal box	Standard
Position of terminal box	on the top
Cable gland	Sealing plug
Position of cable entry	right
Shaft	Standard
Bearing	Easy bearing arrangement
Special details to bearings	none
Bearing monitoring	none
Anti-condensation heating	none
Limit values to vibration velocity	Class A
	Balancing with half key
Colour system	01 Moderate (KK C2),RAL 7031 blue-grey,60 µm


Delivery conditions and/or official regulations: IEC / EN 60034-1
Special customer specifications without

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer

Three-phase motors with squirrel cage rotor,
Housing grey cast iron


IE3-W41R 80 GY2

Mounting position



Type of mounting: IM B3
Flange: -
Position of terminal box: on the top
Brake type:
Forced-ventilation:

Terminal box: KA 05
Cable gland O: 1 xSealing plug

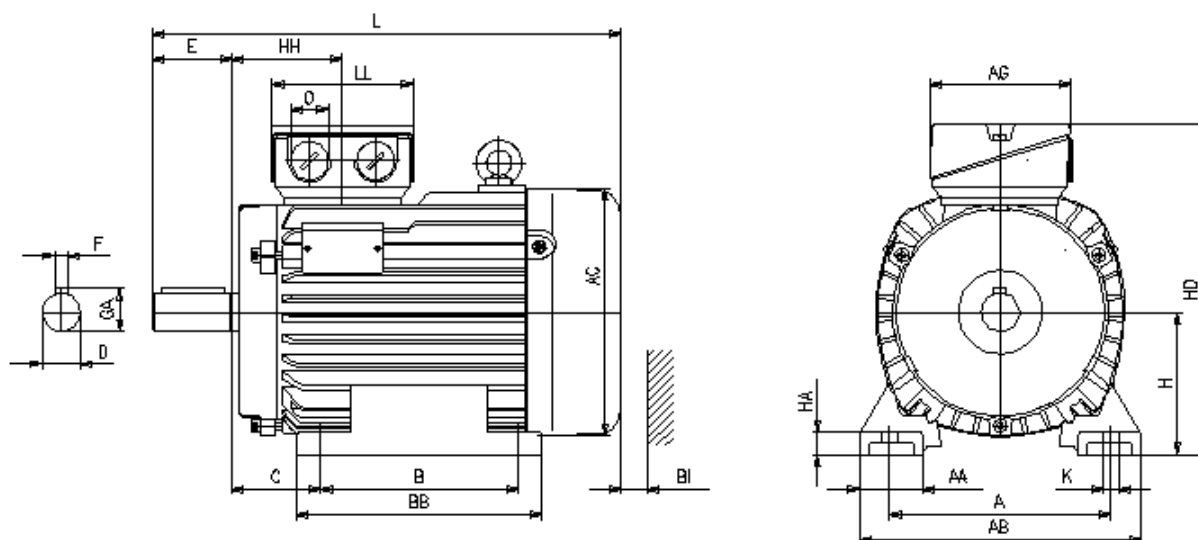

Motor

A	AA	AB	AC	AD	B	B'	BA	BA'	BB	C	CA	K	K'
125	26	152	157	-	100	-	-	-	125	50	-	10	10

Terminal box

L	LC	H	HA	HD	HH	BI	AG	LL	BE	AH
265	-	80	9	200	70	16	92	92	-	-

Flange

P	N	LA	M	T	S
-	-	-	-	-	-

Tolerances

H	N	D	DA
-0,5	j6	k6	k6

Shaft-DS

D	E	GA	F	DB
19	40	21,5	6	DIN 332 DS - M6

Shaft-NS

DA	EA	GC	FA
-	-	-	-

DB...Centre hole

Delivery conditions and/or official regulations: IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer